



PD79X Ex

Intrinsically Safe Digital Portable Two-way Radio

- Most Completely Certified DMR IS Radio
- ATEX/IECEX/FM/CSA/CQST IIC Certificated
- Designed for Hazardous Working Environments





PD79X Ex

Two-way radio has been a necessary device for many professionals. For those who work in environments with explosive gas and combustible dusts, safety is on top of everything and using regular radios could be unsafe.


Hytera understands what's underneath the challenges in hazardous environments and launches PD79X Ex to deliver safe communication solutions. The DMR portable radio comply with the world's strictest safety standard.



Technical Highlights


Improved PCB Circuit Layout & EMC Shielding

To achieve high safety standard, Hytera PD79X Ex adopts optimized wiring design on PCB to minimize circuit fault. All key components on the PCB are covered with shield, and the space between lines, components, component and shield are proper for better EMC performances and less internal interference.

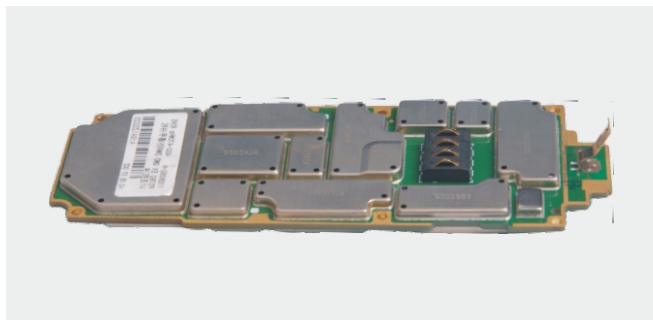

Innovative Silicone Encapsulating

Silicone encapsulation technology prevents the internal circuits from liquid, dust and harmful gas. The silicone encapsulating process is delicate and complicated, and costs about eight hours for each PD71X Ex/PD79X Ex.

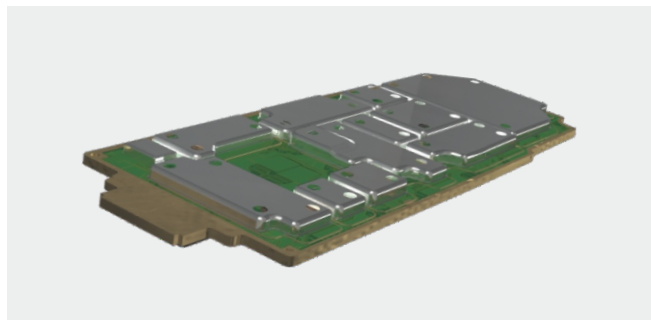

Innovative Electrostatic Discharge Design

Hytera applies electrostatic discharge design and dual-material molding technology on the radio. The electrostatic discharge material (blue) minimizes electrostatic accumulation on radio surface, while the robust material (black) maximizes ruggedness of the enclosure.



Patented Battery Latch

To remove the battery from the radio, the lock and bolt of the latch need to be moved along two different axes. Such patented design locks the battery in case of dropping which might cause a spark.





Product Highlights

Environmentally Safe and High Reliability

Hytera PD79X Ex is designed upon the strict requirements of European ATEX and North American FM standards. With certifications for ATEX, IECEx, the latest FM and CSA specifications, the radio works safely in most hazardous environments even with the presence of hydrogen and dust particles. The overall design complies with the latest American Military Standard-MIL-STD-810G, which confirms it can tolerate the harshest environments like High/Low Temperature, High Humidity, Vibration and Shock.

Enhanced Safety

Hytera PD79X Ex provides a dedicated emergency button. In case of any accident, a press on the button will trigger an alarm and initiate a voice call to a pre-programmed work fellow or group. Man-down, GPS and Lone Worker features are also available to further ensure the safety.

PD79X Ex



High-capacity and Safe Li-Ion Battery

Hytera PD79X Ex provides high-capacity Li-Ion battery with long shift life of 17 hours under 5-5-90 duty cycle. The overcharge and over-discharge design protects the battery against instability caused by overheating. In addition the battery cells are also encapsulated to redistribute single point heat buildup and prevent air discharge.

High Audio Quality and Assured Communication Based on DMR Technology

Benefitted from , PD79X Ex provides higher audio quality and smore stable performance with 40% less battery consumption than analog radios. It provides better communication quality and enhanced privacy, and moreover reduces overall equipment costs.

Easy to Use


Hytera PD79X Ex is very easy to use. It provides tough and highly readable LCD screen and intuitive user interface. The anti-skidding and fergonomic design are dedicated for easy operation. Large PTT button and channel knobs are equally useful for easy user operation.

Software Upgradable


New features can be enabled via software upgrade. Moreover, PD79X Ex can switch to DMR or MPT trunking mode through license.

Certification



ATEX is the European Union directive to which all two-way radios must conform if used in potentially explosive environments. It replaces the Cenelec classification in all European Union member states and EFTA countries.

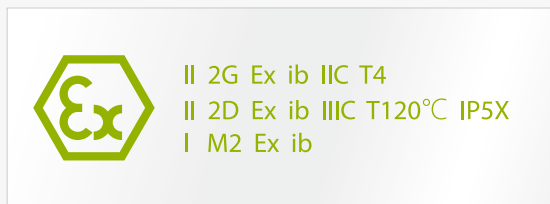

IECEx Scheme is the future route to global compliance certification. Its aim is to harmonize standards to allow free movement of goods by establishing a world-wide accepted standard.

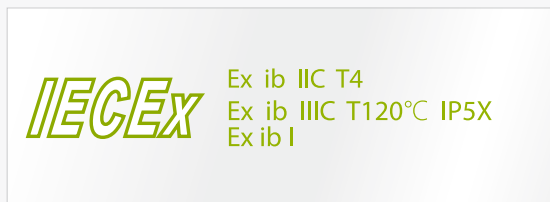

FM (FM Approvals LLC) is a member of Nationally Recognized Testing Laboratories of U.S.A. It strives to offer global services with unsurpassed technical integrity and exceptional customer satisfaction.

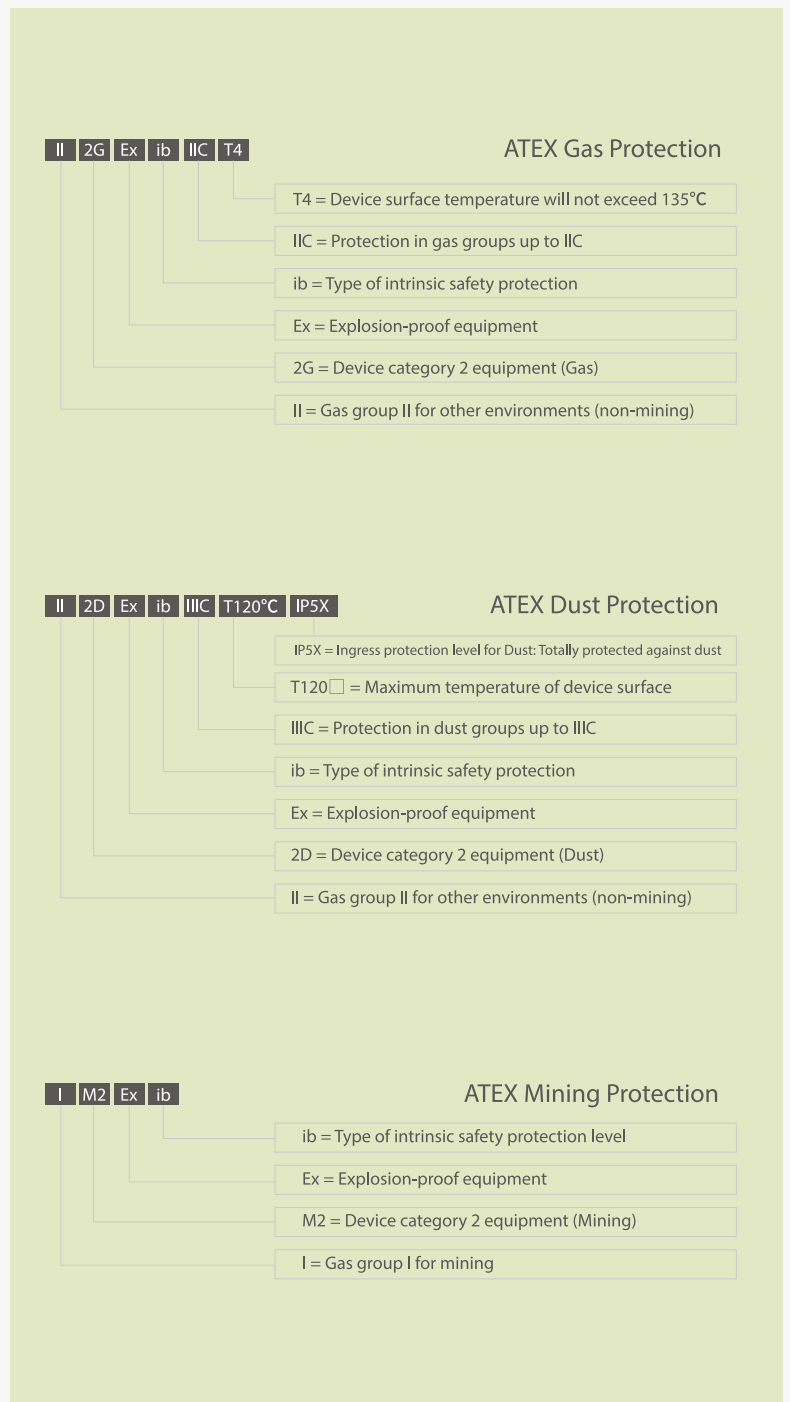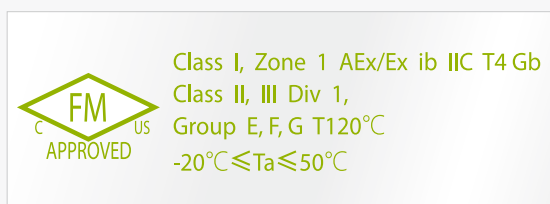

Applications



Chemical Industry

Flammable gases, liquids and solids are converted and processed in many different processes in the chemical industry. These processes may give rise to explosive mixtures.



Power Generating Companies

Lump coal, which is not explosive in mixture with air, may be converted in the conveying, grinding and drying processes into coal dusts capable of forming explosive dust/air mixtures.



Mining

The by-product of coal mining is gas. Following the coal exploiting, the gas will gather under the ground. If there is poor safety management, gas in coal mine can lead to serious gas explosion.



Fire Fighting

As for fire fighting, some task critical situations such as oil spill or natural gas leakage need high security electrical equipments.



Pharmaceutical Industry

Alcohols are often used as solvents in the production of pharmaceuticals. Agents and auxiliary materials that give rise to dust explosions, such as lactose, may also be used.



Refineries

The hydrocarbons handled in refineries are all flammable and, depending on their flash point, may give rise to explosive atmospheres even at ambient temperature. The area around oil processing plant is generally regarded as a place where explosive atmospheres may occur.

More Examples of Explosive Hazards...

Landfill Tips and Civil Engineering

Flammable landfill gases may arise in landfill tips. Elaborate technical arrangements are needed to avoid uncontrolled gas emission and possible ignition. Flammable gases from various sources may collect in poorly ventilated tunnels, cellars, etc.

Recycling Operations

Processing of waste for recycling can give rise to explosion hazards, e.g. from cans or other containers of flammable gases and/or liquids that have not been completely emptied or from paper or plastic dusts.

Food and Feedstuffs Industry

Explosive dusts may arise during transport and storage of grain, sugar, etc. If they are exhausted and collected by filtering, explosive atmospheres may arise in the filter.

Paint-spraying Operations

The overspray generated in paint spray bays and the solvent vapors released may give rise to explosive atmospheres when mixed with air.

Agriculture

Biogas production plants are operated on some farms. Explosive biogas/air mixtures may arise if the gas is released, e.g. by leakage.

Gas Suppliers

Explosive gas/air mixtures may be formed when natural gas is released, e.g. by leakage.



Specifications

General	Frequency Range	UHF1: 400-470MHz; UHF3: 350-400MHz VHF: 136-174MHz
	Channel Capacity	1024
	Zone Capacity	64 (each with a maximum of 256 channels)
	Channel Spacing	12.5kHz / 20kHz / 25kHz
	Operating Voltage	7.4V (rated)
	Battery	1800mAh (Li-Ion)
	Battery Life(5-5-90 Duty Cycle, High TX Power) High-capacity 1800mAh Li-Ion Battery	Analog: about 14.5 H / 13 H (GPS) Digital: about 17 H / 15 H (GPS)
	Frequency Stability	±.5ppm
	Antenna Impedance	50Ω
	Dimensions (H×W×D) (with standard battery, without antenna)	141 x 55 x 39 mm
Weight (with antenna & standard battery)	495g	
LCD display	160 x 128 pixels, 65536 color, 1.8-inch	
Anti-explosion levels	ATEX	II 2G Ex ib IIC T4 II 2D Ex ib IIC T120°C IP5X I M2 Ex ib
	IECEX	Ex ib IIC T4 Ex ib IIC T120°C IP5X Ex ib I
	FM/CSA	Class I, Zone 1 AEx/Ex ib IIC T4 Gb Class II, III Div 1, Group E, F, G T120°C -20°C Ta 50°C
Environmental Specifications	Operating Temperature	-20°C ~ +50°C
	Storage Temperature	-40°C ~ +85°C
	ESD	IEC 61000-4-2 level 4 8kV (contact) 5kV (air)
	American Military Standard	MIL-STD-810 C/D/E/F/G
	Dust & Water Protection	IP67
	Humidity	Per MIL-STD-810 C/D/E/F/G
GPS	Shock & Vibration	Per MIL-STD-810 C/D/E/F/G
	TTFF (Time To First Fix) Cold Start	<1 minute
	TTFF (Time To First Fix) Hot Start	<10 seconds
	Horizontal Accuracy	<5m (50% probable) <10m (95% probable)

Transmitter	RF Power Output	1W	
	FM Modulation	11K0F3E @ 12.5 kHz 14K0F3E @ 20 kHz 16K0F3E @ 25 kHz	
	4FSK Digital Modulation	12.5kHz Data Only: 7K60FXD 12.5kHz Data & Voice: 7K60FXW	
	Conducted/Radiated Emission	-36dBm≤1GHz -30dBm>1GHz	
	Modulation Limiting	±2.5 kHz @ 12.5 kHz ±4.0 kHz @ 20 kHz ±5.0 kHz @ 25 kHz	
	FM Noise	40dB @ 12.5 kHz 43dB @ 20 kHz 45dB @ 25KHz	
	Adjacent Channel Power	60dB @ 12.5 kHz; 70dB @ 20/25 kHz	
	Audio Response	+1 ~ -3dB	
	Audio Distortion	≤3%	
	Digital Vocoder Type	AMBE+2™ or SELP	
Digital Protocol	ETSI-TS102 361-1,-2,-3		
Receiver	Sensitivity	Analog	0.3μV (12dB SINAD) 0.22μV (typical) (12dB SINAD) 0.4μV (20dB SINAD)
		Digital	0.3μV /BER5%
	Selectivity TIA-603 ETSI	60dB @ 12.5 kHz/70dB @ 20 & 25 kHz 60dB @ 12.5 kHz/70dB @ 20 & 25 kHz	
	Intermodulation TIA-603 ETSI	70dB @ 12.5/20/25kHz 65dB @ 12.5/20/25kHz	
	Spurious Response Rejection TIA-603 ETSI	70dB @ 12.5/20/25kHz 70dB @ 12.5/20/25kHz	
	Hum and Noise	40dB @ 12.5kHz 43dB @ 20kHz 45dB @ 25kHz	
	Rated Audio Power Output	0.5W	
	Rated Audio Distortion	≤3%	
	Audio Response	+1 ~ -3dB	
	Conducted Spurious Emission	< -57dBm	

* This frequency band will be available soon.

[†]GPS Accuracy Conditions: 5 satellites visible at nominal -130dBm

All Specifications are tested according to applicable standards, and subject to change without notice due to continuous development.

Accessories

Standard

- Li-Ion Battery
- MCU Rapid-rate Charger
- Power Adapter
- Antenna
- Belt Clip
- Leather Strap

Optional



Intrinsically Safe Remote Speaker Microphone(IP57) SM18N4-Ex



Carrying Case with (Leather) (swivel) LCY005



Programming Cable (USB Port) PC38



Intrinsically Safe Bone Conduction Headset(IP57) EBN10-Ex



Intrinsically Safe Noise-cancelling Headset ECN20-Ex



Intrinsically Safe Throat-vibrating Earpiece(IP57) ELN09-Ex



Hytera Communications Corporation Limited

Address: Hytera Tower, Hi-Tech Industrial Park North, Beihuan Rd., Nanshan District, Shenzhen, China

Tel: +86-755-2697 2999 Fax: +86-755-8613 7139 Post: 518057

Http://www.hytera.com Stock Code: 002583.SZ

Hytera retains right to change the product design and specification. Should any printing mistake occur, Hytera doesn't bear relevant responsibility. Little difference between real product and product indicated by printing materials will occur by printing reason.

Hytera, SODURA, STELTRONIC, NORBIT, SINCLEAR, HYT are registered trademarks of Hytera